
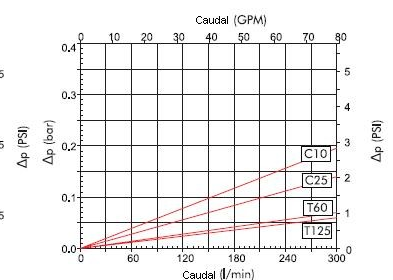
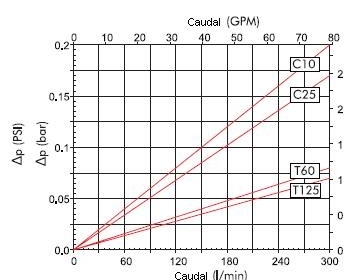



SPA-1-10

SPA-1-11

SPA-1-20

SPA-1-21



Presión Máxima 12 bar

Filtro · Celulosa: 10μ y 25μ
· Malla Metálica: 60μ y 125μ

Materiales · Cuerpo: Aluminio
· Junta: Buna-N

Temperatura de Trabajo -25°C / 120°C

Artículo	Tamaño	Grado filtración	ØA	ØB	C
SPA-1-10-C10	10	10 μ	96	3/4"	148
SPA-1-11-C10	11	10 μ	96	3/4"	213
SPA-1-20-C10	20	10 μ	128	1 1/4"	182
SPA-1-21-C10	21	10 μ	128	1 1/4"	228
SPA-1-10-C25	10	25 μ	96	3/4"	148
SPA-1-11-C25	11	25 μ	96	3/4"	213
SPA-1-20-C25	20	25 μ	128	1 1/4"	182
SPA-1-21-C25	21	25 μ	128	1 1/4"	228
SPA-1-10-T60	10	60 μ	96	3/4"	148
SPA-1-11-T60	11	60 μ	96	3/4"	213
SPA-1-20-T60	20	60 μ	128	1 1/4"	182
SPA-1-21-T60	21	60 μ	128	1 1/4"	228
SPA-1-10-T125	10	125 μ	96	3/4"	148
SPA-1-11-T125	11	125 μ	96	3/4"	213
SPA-1-20-T125	20	125 μ	128	1 1/4"	182
SPA-1-21-T125	21	125 μ	128	1 1/4"	228